

SEA-MIL-32PT

32" PCAP Rack Mount Defense Display



KEY FEATURES

- 32", 1920 x 1080 resolution
- Compliant MIL-STD 810G/ MIL-STD 461E
- Rack mount mechanical design, supports VESA mount
- PCAP multi-touch screen, front IP65
- Defence-grade power connector (MIL-DTL-38999/1)
- AC 100~240V, Universal, $\pm 10\%$; DC 9~36V, $\pm 10\%$ (Optional)
- Convenient on-screen display controls

INTRODUCTION

Winmate PCAP Rack Mount Defence Display Series delivers robust performance and reliability for mission-critical applications. Available in sizes from 15" to 32", these displays feature PCAP multi-touch screens, compliant with MIL-STD 810G and MIL-STD 461E for durability in harsh environments. The rack mount design with VESA compatibility ensures seamless integration, while the defence-grade power connector (MIL-DTL-38999/1) enhances safety. Ideal for military and industrial use, the series offers resolutions up to 1920x1080, universal AC/DC power options, and convenient on-screen display controls.

SPECIFICATIONS

Display

Resolution	1920x1080	Size	32.0 inches
Contrast Ratio	4000:1	Panel Brightness	400.0 nits
Display Color	16.7M Colors	View Angles	89,89,89,89
Active Area	698.4x392.85 mm	Touch / Glass	Projected Capacitive Multi Touch Screen PCAP with With ITO Film (Optional)

Environment

Operating Humidity	10% to 95% RH	Operating Temperature	0~50°C
Storage Temperature	-10°C~60°C		

Compliance

MIL-STD 461G	RE101 / RE102 CE101 / CE102 CS118 with EMI Glass / Touch(Optional) RS101 / RS 103 CS101 / CS 106 / CS 109 / CS 114 / CS 115 / CS 116	MIL-STD 810H	Vibration Method 514.8 Humidity Method 507.6 Transit Drop Method 516.8
---------------------	---	---------------------	--

Certification

Certification	CE, FCC
----------------------	---------

IO Ports

USB Port	1 x USB for Touch Screen	Video	1 x VGA 1 x DVI-D 1 x HDMI
-----------------	--------------------------	--------------	----------------------------------

Mechanical

Dimension	825 x 500 x 87.2 mm	Mounting	VESA mount Rear mount (Optional)
Enclosure	Metal Housing with Aluminum Bezel	Cooling System	Fanless Design

Accessory

Accessory	1 x User Manual(Hardcopy) 1 x Power Cord MIL-DTL-38999/1 1 x VGA Cable 1 x DVI Cable 1 x HDMI
------------------	---


Power

Power Rating	AC 100~240V, Universal, ±10% DC 9~36V, ±10% (Optional)
---------------------	---

Control

Button	1 x "Power" key to power on the device. 1 x "+" key to increase screen brightness. 1 x "-" key to decrease screen brightness. 1 x "Menu" key can Automatically or manually adjusts brightness of the display screen 1 x Day / Night Mode button 1 x LED indicator brightness adjustment button 1 x Ambient Light sensor
---------------	---

DIMENSIONS UNIT:MM

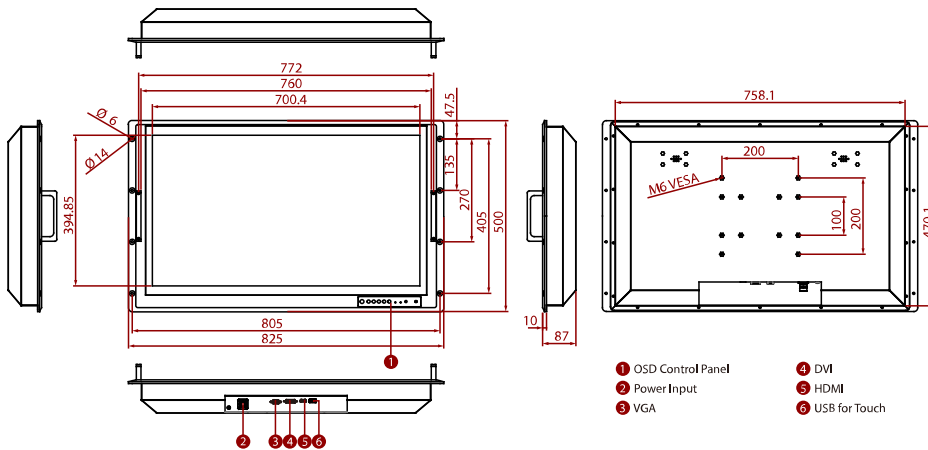

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. If you require an external test report, Winmate will charge an NRE fee.
3. Please contact our sales representative if you need further product information.
4. All specifications are subject to change without prior notice.
5. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Seatronx Sales Team for more information.