

SSPPC-15T-1NSX

15" P-cap Panel PC with 7th/6th Gen
KabyLake-U/Skylake-U Core™ i7/i5/i3, IP65 /
66 Bezel-Free and Wide Range Power Input



Features

- ▶ -20~60°C Operating Temp
- ▶ IP65 / 66 Front Panel
- ▶ Bezel-Free Design
- ▶ Fanless Design
- ▶ 3-Pin Power Input Terminal Block
- ▶ DC 12~24V Wide Range Power Input
- ▶ 1024*768 Resolution
- ▶ 300 nits LED Backlight
- ▶ Optional 1000 nits LED Backlight
- ▶ Lockable HDD Tray

System

Processor	7th/6th Gen KabyLake-U/Skylake-U Core™ i7/i5/i3
System Memory	DDR4 SO-DIMM, up to 16 GB
External I/O Port	4 x USB 3.0 2 x GbE LAN (I210-AT & I219LM, AMT 11.x supported)
	1 x Display Port 1 x HDMI 3 x RS-232 1 x RS-232/422/485 (COM1)
	1 x Audio 1 x Power press button
	1 x 3-Pin Power Input 1 x Lockable HDD Tray
Storage	2 x SATA3 (6.0Gb/s) 1 x mSATA (full size mini-PCIe)
Operating System	6th Gen CPU for Win 7 Pro/ WES7 / Win 8 / Win 10 7th Gen CPU for Win 10
Expansion	2 x MiniPCIe Slot (1 x Nano Sim Holder)

LCD

Display Type	15" TFT LCD
Max. Resolution	1024*768
Max. Color	16.7M
Luminance	300 nits
View Angle	80/80/80/80 (IPS 88/88/88/88 optional)
Backlight Lifetime	30,000 hours

Power Requirement

Power Input	3-Pin Power Input Terminal Block DC 12~24V Power Input Fuse / Input reverse / Over current / Output short circuit protection
-------------	---

Environment

Operating Temp	-20~60 °C , IEC-60068-2-1/2/14
Storage Temp	-30~70 °C
Humidity	10~90% @40 °C, non-condensing
EMC	FCC / CE Class A Certification CE Class B Compliant
Vibration	1.5 Grms @10~500Hz, IEC-60068-2-64

Mechanical

Construction	Aluminum Front Bezel and Metal Case
IP Rating	Front Panel IP65 / IP66 Compliant
Mounting	VESA / Panel Mount
Dimension	305.11 x 281.5 x 82.5 mm


Touch Screen

Type	15" P-cap USB
------	---------------

SSPPC-15T-1NSX

* All specifications are subject to change without prior notice.

Dimension & I/O Connector

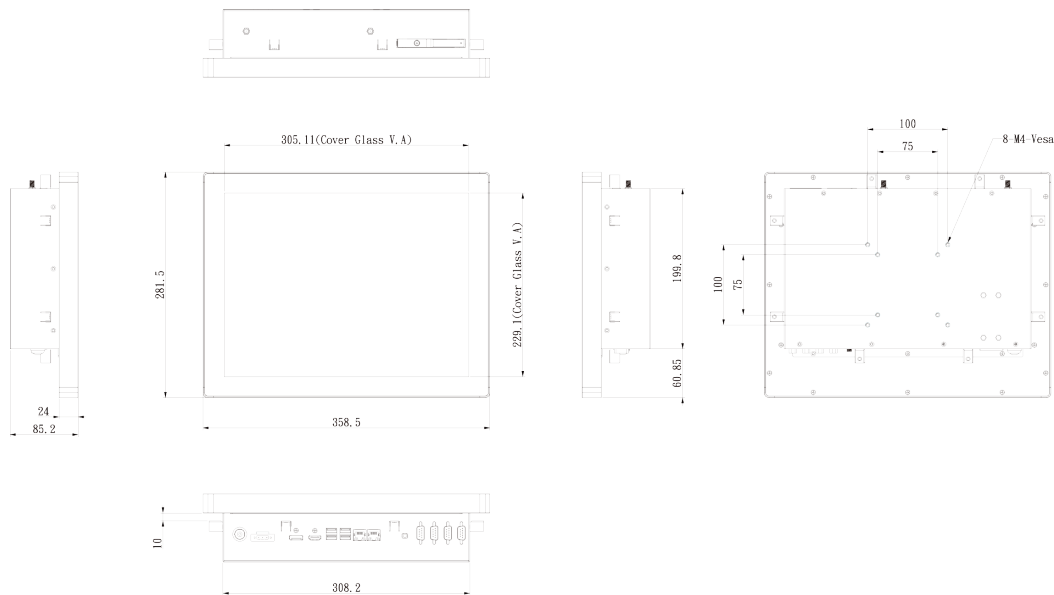

USA: (800) 607-1460
TEL: (772) 418-5035
EMAIL: Info@Seatronx.com
WEBSITE: www.seatronx.com