


SSPPC Series

Stainless Steel Panel PCs - P-CAP Touch, IP66 Sealed Panel PCs



Our Vision is Your Vision

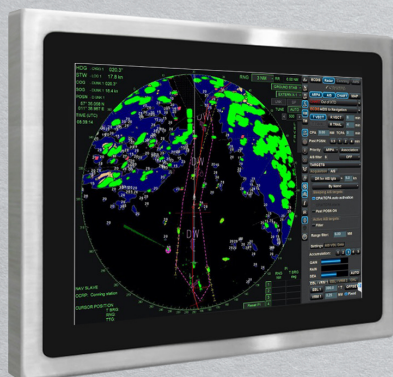

15" Display
SSPPC-15T



17" Display
SSPPC-17T



18.5" Display
SSPPC-185T



19" Display
SSPPC-19T



11.5" Display
SSPPC-215T



24" Display
SSPPC-24T

Features

- 7th/6th Gen Kaby Lake-U/Skylake-U Core™ i7/i5/i3
- 15" 17", 18.5", 19", 21.5" P-cap Flat Bezel
- DC 9~36V Wide Range Power Input
- High Resolution
- Bottom Side M12 Plastic Connector M12
- Plastic Waterproof Connectors
- Stainless Steel 304 Food Grade

REV 1.02.10.21




Model	SSPPC-15T	SSPPC-17T	SSPPC-185T	SSPPC-19T	SSPPC-215T	SSPPC-24T
Active Area	15"	17"	18.5"	19"	21.5"	24"
Resolution	1024 x 768	1280 x 1024	1920 x 1080	1280 x 1024	1920 x 1080	1920 x 1080
Case Material	Stainless Steel					
Case Seal	IP66 6 Sides					
Connection Seal	M12 Plastic waterproof					
Connections	HDMI/LAN/USB/					
Power Input	DC 12~24V, Optional 9~36VDC					
CPU	Kabylake-U i5-7300U or Kabylake-U i7-7600U					
Brightness	300nits	350nits	350nits	250nits	250nits	250nits
Viewing Angle	88/88/88/88	80/80/60/80	89/89/89/89	85/85/80/80	89/89/89/89	89/89/89/89
Operating Temp.	-20~60°C					


SSPPC Series Stainless Steel Panel PCs	
Part Number:	Description :
SSPPC-15T-i5	15" Stainless Steel P-cap Touch Panel PC, Kabylake-U i5-7300U, with -20~60 degrees operating temp, 6 sides IP66, M12 plastic waterproof connectors of HDMI/LAN/USB/Power input, DC 12~24V, Optional 9~36VDC, with DC 12V adapter
SSPPC-15T-i7	15" Stainless Steel P-cap Touch Panel PC, Kabylake-U i7-7600U, with -20~60 degrees operating temp, 6 sides IP66, M12 plastic waterproof connectors of HDMI/LAN/USB/Power input, DC 12~24V, Optional 9~36VDC, with DC 12V adapter
SSPPC-17T-i5	17" Stainless P-cap Touch Panel PC, Kabylake-U i5-7300U, with -20~60 degrees operating temp, 6 sides IP66, M12 plastic waterproof connectors of HDMI/LAN/USB/Power input, DC 12~24V, Optional 9~36VDC, with DC 12V adapter
SSPPC-17T-i7	17" Stainless P-cap Touch Panel PC, Kabylake-U i7-7600U, with -20~60 degrees operating temp, 6 sides IP66, M12 plastic waterproof connectors of HDMI/LAN/USB/Power input, DC 12~24V, Optional 9~36VDC, with DC 12V adapter
SSPPC-185T-i5	18.5" Stainless P-cap Touch Panel PC, Kabylake-U i5-7300U, with -20~60 degrees operating temp, 6 sides IP66, M12 plastic waterproof connectors of HDMI/LAN/USB/Power input, DC 12~24V, Optional 9~36VDC, with DC 12V adapter
SSPPC-185T-i7	18.5" Stainless P-cap Touch Panel PC, Kabylake-U i7-7600U, with -20~60 degrees operating temp, 6 sides IP66, M12 plastic waterproof connectors of HDMI/LAN/USB/Power input, DC 12~24V, Optional 9~36VDC, with DC 12V adapter
SSPPC-19T-i5	19" Stainless P-cap Touch Panel PC, Kabylake-U i5-7300U, with -20~60 degrees operating temp, 6 sides IP66, M12 plastic waterproof connectors of HDMI/LAN/USB/Power input, DC 12~24V, Optional 9~36VDC, with DC 12V adapter
SSPPC-19T-i7	19" Stainless P-cap Touch Panel PC, Kabylake-U i7-7600U, with -20~60 degrees operating temp, 6 sides IP66, M12 plastic waterproof connectors of HDMI/LAN/USB/Power input, DC 12~24V, Optional 9~36VDC, with DC 12V adapter
SSPPC-215T-i5	21.5" Stainless P-cap Touch Panel PC, Kabylake-U i5-7300U, with -20~60 degrees operating temp, 6 sides IP66, M12 plastic waterproof connectors of HDMI/LAN/USB/Power input, DC 12~24V, Optional 9~36VDC, with DC 12V adapter
SSPPC-215T-i7	21.5" Stainless P-cap Touch Panel PC, Kabylake-U i7-7600U, with -20~60 degrees operating temp, 6 sides IP66, M12 plastic waterproof connectors of HDMI/LAN/USB/Power input, DC 12~24V, Optional 9~36VDC, with DC 12V adapter
SSPPC-24T-i5	23.8" Stainless P-cap Touch Panel PC, Kabylake-U i5-7300U, with -20~60 degrees operating temp, 6 sides IP66, M12 plastic waterproof connectors of HDMI/LAN/USB/Power input, DC 12~24V, Optional 9~36VDC, with DC 12V adapter
SSPPC-24T-i7	23.8" Stainless P-cap Touch Panel PC, Kabylake-U i7-7600U, with -20~60 degrees operating temp, 6 sides IP66, M12 plastic waterproof connectors of HDMI/LAN/USB/Power input, DC 12~24V, Optional 9~36VDC, with DC 12V adapter
Options/Accessories	
WVI-36	Wide Voltage Input 9~36VDC
VS-75x100	VESA Stand: 75 x 75 / 100 x 100 VESA Stand for 15kg (33.1lbs)

Dimension & I/O Connectors


SSPC-15T

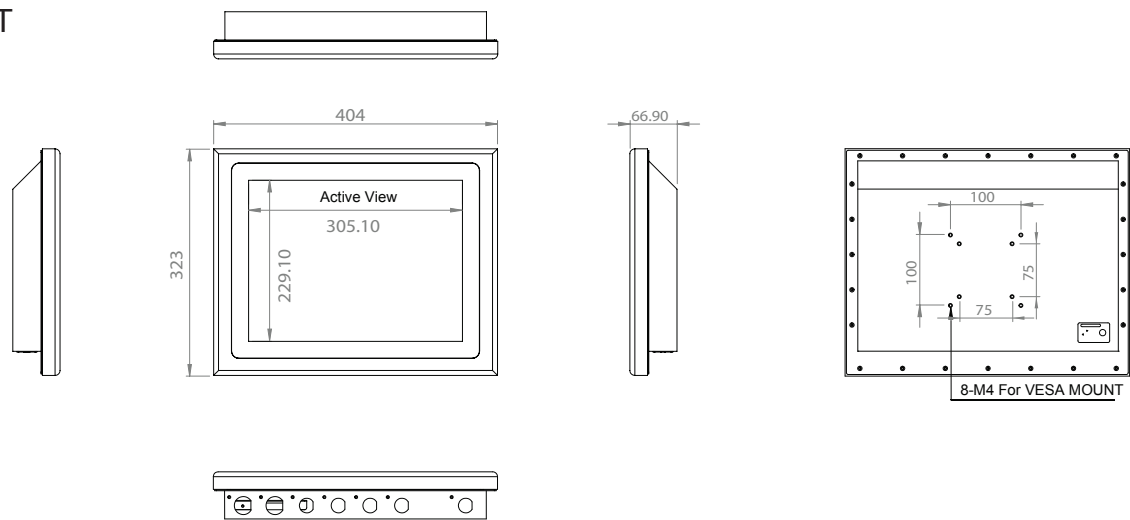

SSPC-17T

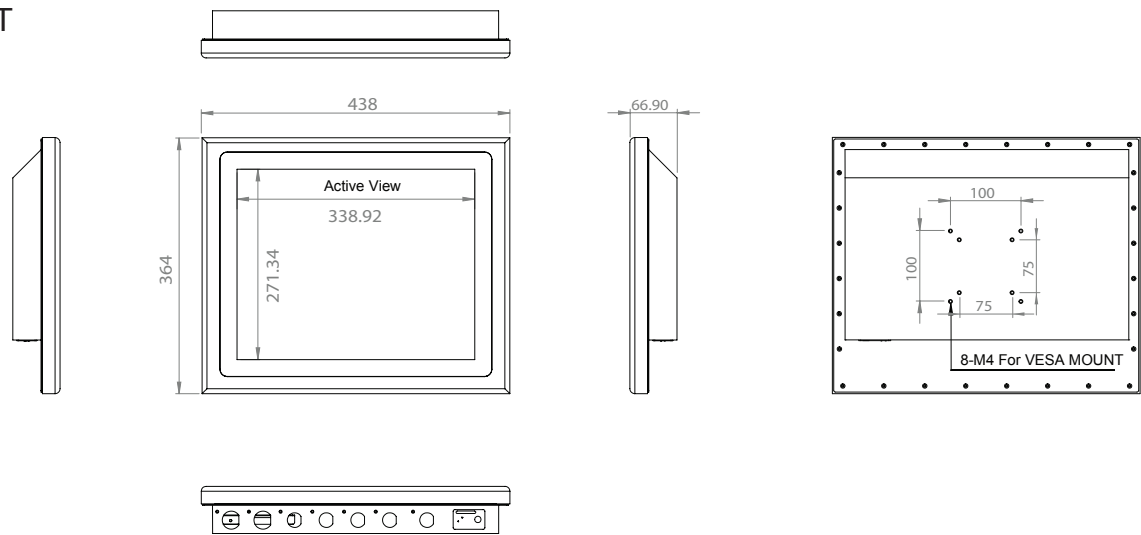


SSPC-185T

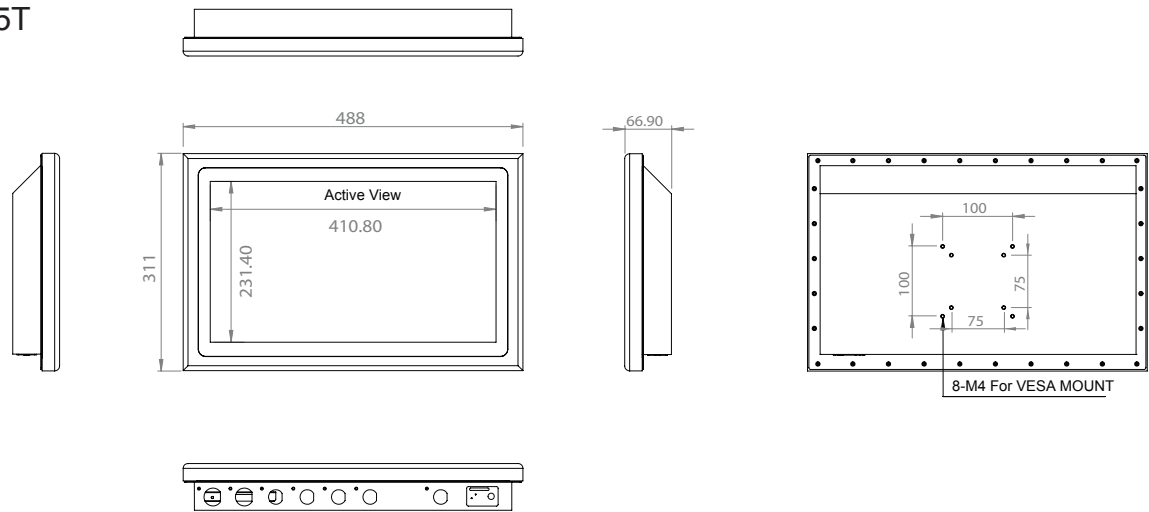


Dimension & I/O Connectors

SSPC-19T

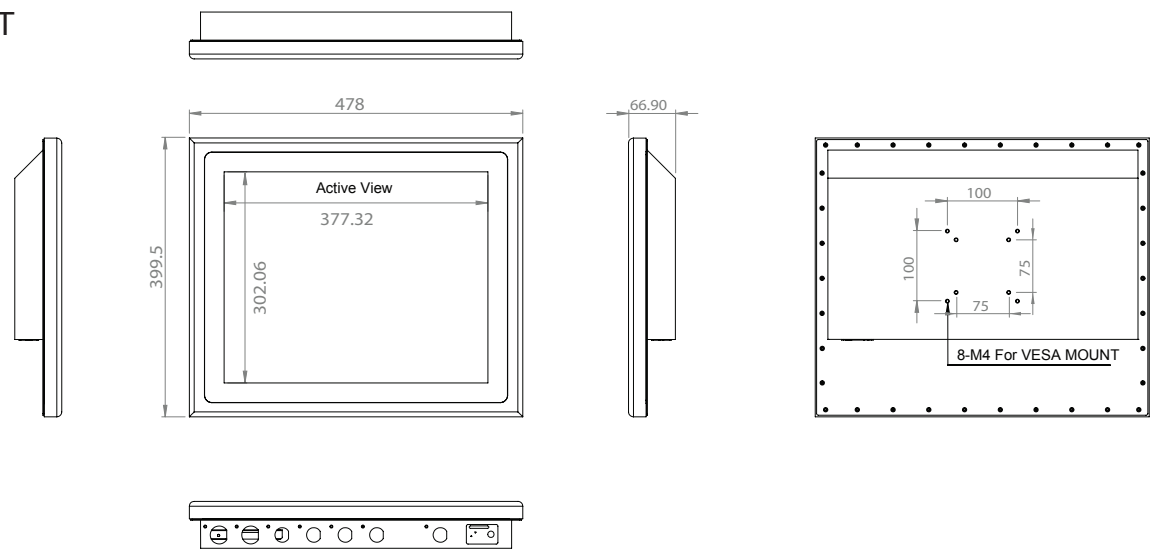

SSPC-215T

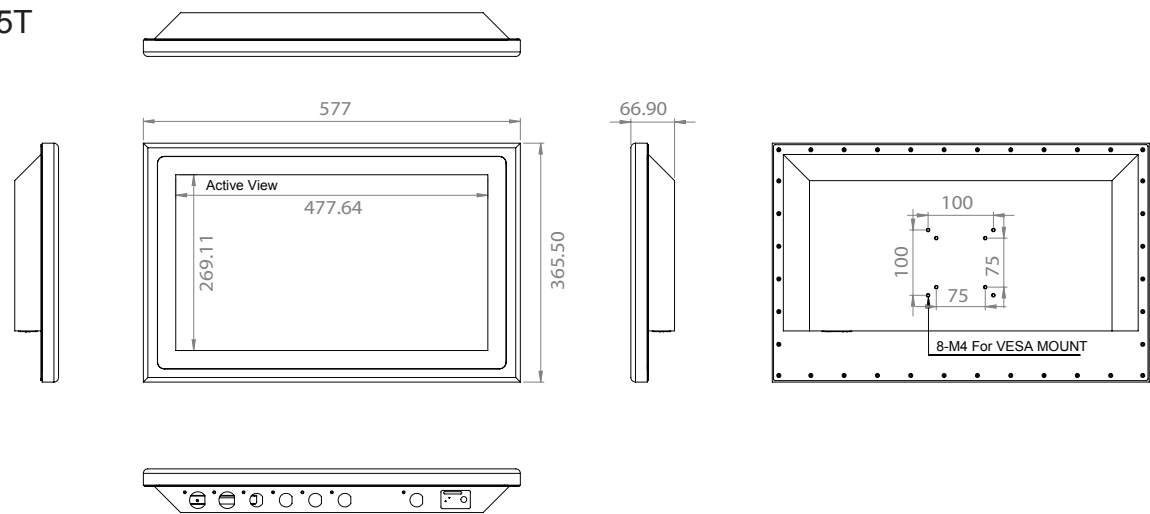

SSPC-24T