



SXT Series Manual


Front View




Rear View



Layout of front keypad and rear I/O

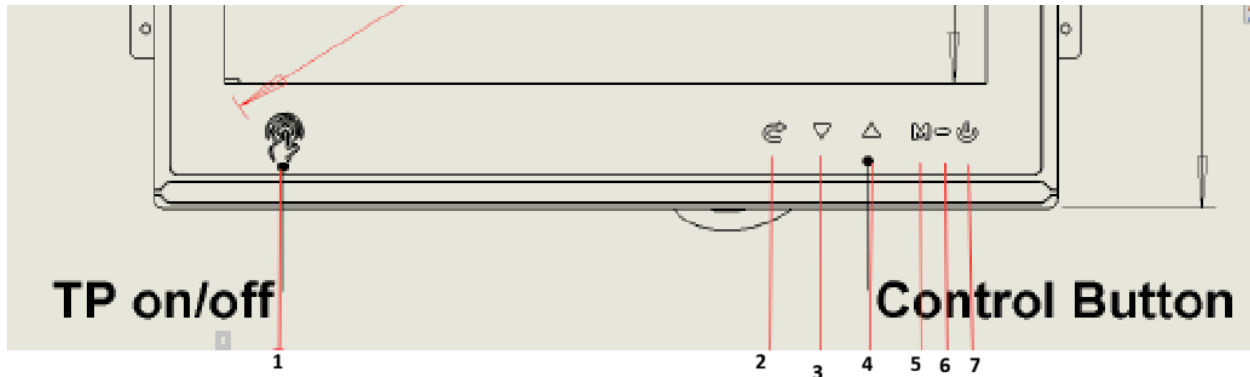

1. **Touch Control:** Press this key to activate or disable touch function.
2. **Power:** Press this key to power on or standby.
3. **MENU:** Menu Key. Press the key to pop up or close OSD.
4. **VOL+:** Volume up, or value up while using menu setting functions.
5. **VOL-:** Volume down, or value down while using menu setting functions.
6. **LED Indication Light**
7. **Exit:** Auto-adjust image and exit menu.

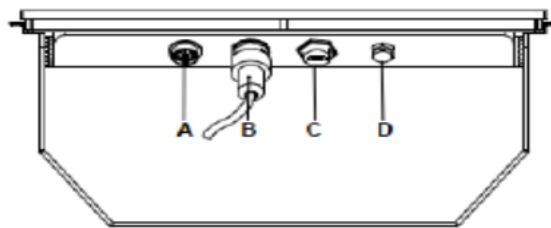



- A. **9-36V DC power input**
- B. **USB for Touch**
- C. **HDMI**
- D. **Breather valve**



Menu Operation:



Press the MENU key to access the menu by pressing "〉" or "〈" button to select the image function menu option, then press the "Menu" button to enter the image menu section, press "〉" or "〈" button to select the desired adjustment options: Auto Picture, Brightness, Contrast, Color, Color Temperature. After selecting the appropriate option, then press "Menu" button to adjust. If you need to exit the OSD menu, you need to press the "⏏" key to exit step by step.

Menu layout

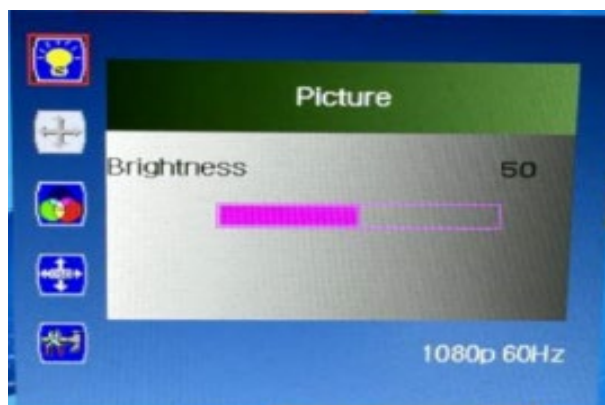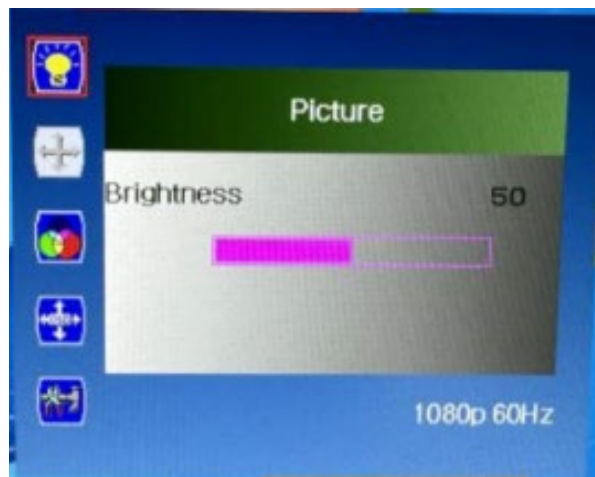



Our Vision is Your Vision

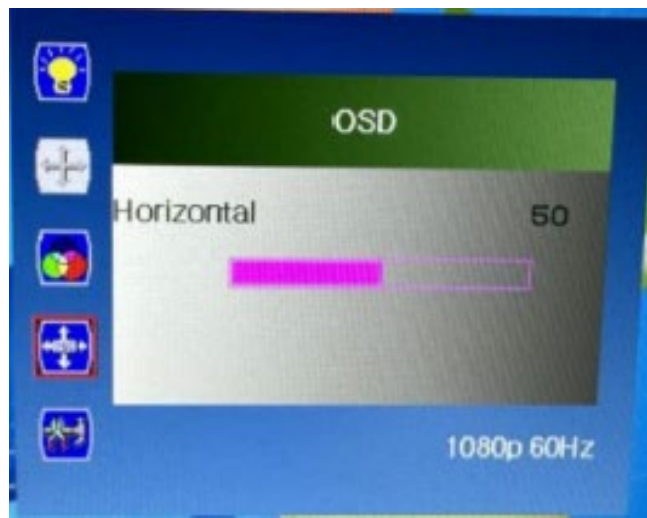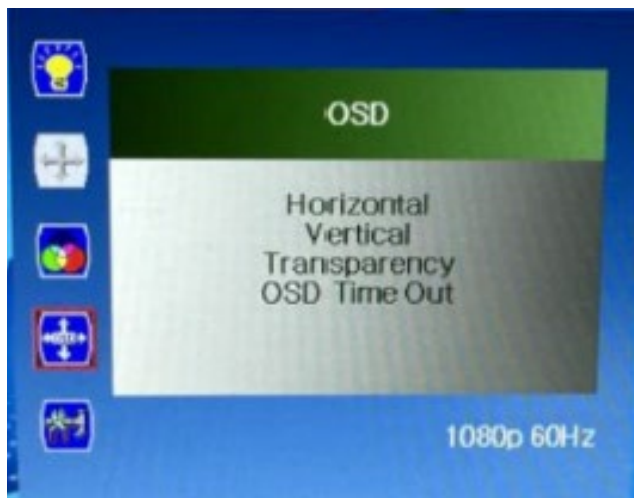



Technical Parameters

| | | |
|------------------|--|--|
| Screen | Size | 12.1", 15.6" |
| | Touch Screen | 10 Points Capacitive Touch Screen (Anti-Glare & Anti-UV Coating) |
| | Resolution | 12.1": 1920×1200 15.6": 1920×1080 |
| | Aspect Ratio | 12.1": 16:10 15.6": 16:9 |
| | Brightness | 1000~1500cd/m ² |
| | Viewing Angles | 89/89/89/89 |
| | Optical Bonding | Yes |
| | The screen is readable with polarized glasses. | |
| Interface | USB | 1×Micro USB Cable (for Touch Connection) |
| | HDMI | 1×HDMI input |
| | Power | 1×DC9~36V input |
| Function | Touch Switch | Yes |
| | OSD | Manual Buttons |



| | | |
|--------------------|----------------|--|
| Others | Housing | Fully Aluminum Alloy |
| | Color | Cold Anodized Black |
| | IP Rate | IP66/IP67 |
| | Rugged Shock | 20G |
| | Mounting | 1: Flush Mounting via Mounting Holes on Top/Bottom 2: Panel Mounting via Clips 3: Yoke Mount(optional) 4: VESA Mounting 100×100 |
| Accessories | HDMI Cable | 1×6m(Waterproof) |
| | USB Cable | 1×6m Micro-USB(Waterproof) |
| | Power Cable | 1×6m DC Power Cable (Waterproof) |
| | Magnetic Cover | Optional |
| | LOGO Printing | Silk Screen Printing on Customer's LOGO optional |

Troubleshooting

1. Only black and white picture. Please check saturation, brightness & contrast adjustment.
2. NO picture after powered on. Check signal cable connection, and make sure to use the correct power adapter.
3. The image color distortion or abnormal, etc. Lack some color. Please check whether signal cable connected correctly or not. The cable damage or loose will cause poor transfer, then above malfunction will happen.
4. If exists an abnormal phenomenon, please try to enter into OSD menu and select "reset" to reset.
5. Cannot be powered on: Please check input voltage